



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### GENERAL DESCRIPTION

BCT4480 is a high performance USB Type-C port multimedia switch which supports analog audio headsets. BCT4480 allows the sharing of a common USB Type-C port to pass USB2.0 signal, analog audio, sideband us e wires and analog microphone signal. BCT4480 also supports high voltage on SBU port and USB port on USB Type-C receptacle side.

The BCT4480 is available in Green 25-Ball WLCSP Package (2.235 mm x 2.275 mm) packages. It operates over an ambient temperature range of -40°C to +85°C.

### FEATURES

- Power Supply: 2.7 V to 5.5 V
- USB High Speed (480 Mbps) Switch:
  - SDD21 -3dB bandwidth: 950 MHz
  - 3  $\Omega$  RON Typical
- Audio Switch
  - Negative Rail Capability: -3 V to +3 V
  - THD+N = -110 dB; 1 VRMS, f = 20 Hz ~ 20 kHz, 32  $\Omega$  Load
  - 1 $\Omega$ RON Typical
- High Voltage Protection
  - 20 V DC Tolerance on Connector Side Pins
  - Over Voltage Protection: VTH = 5 V (Typ)
- OMTP and CTIA Pinout Support
- Support Audio Sense Path
- 25-Ball WLCSP Package (2.235 mm x 2.275 mm)

### APPLICATIONS


- Mobile Phone,
- Tablet,
- Notebook PC,
- Media Player

### ORDERING INFORMATION


Order Number	Package Type	Temperature Range	Marking	QTY/Reel
BCT4480EWA-TR	WLCSP-25L	-40°C to +85°C	4480 XXXXXX	3000

Note: "XXXXXX" in Marking will be appeared as the batch code.

### TYPICAL APPLICATION CIRCUIT

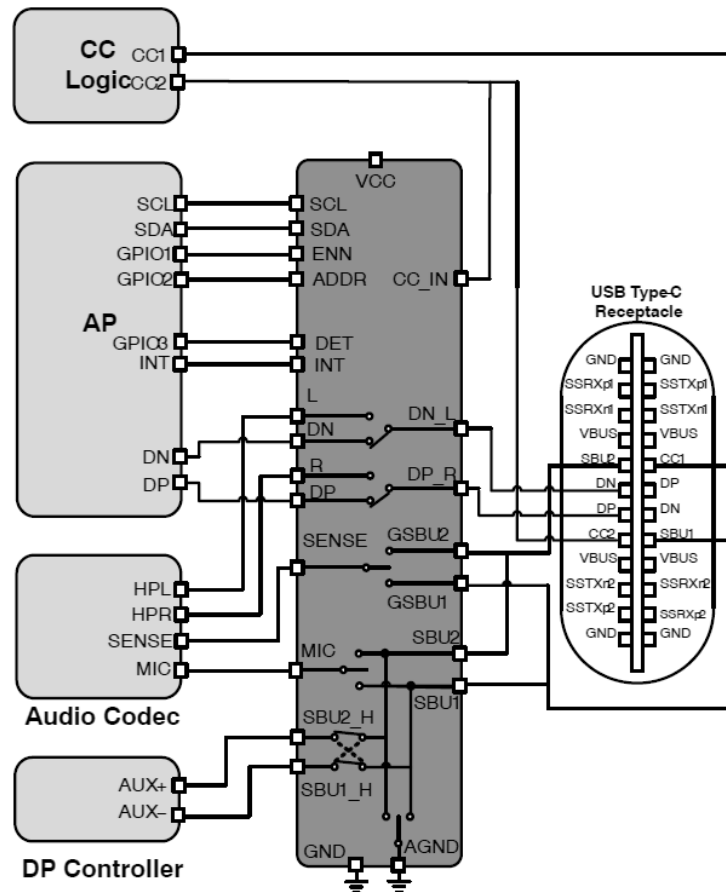

### PIN CONFIGURATION(Top View)

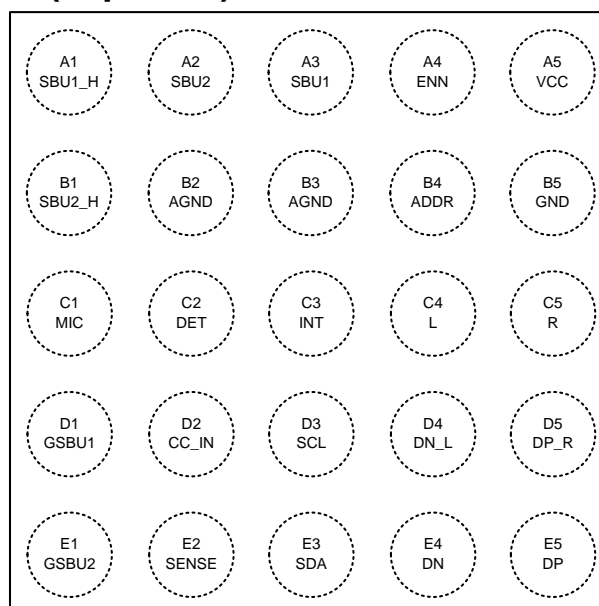

### PIN DESCRIPTION

No.	Pin	Name	Description
1	A5	VCC	Power Supply (2.7 to 5.5 V)
2	B5	GND	Chip ground
3	D5	DP_R	USB/Audio Common Connector
4	D4	DN_L	USB/Audio Common Connector
5	E5	DP	USB Data (Differential +)
6	E4	DN	USB Data (Differential -)
7	C5	R	Audio – Right Channel
8	C4	L	Audio – Left Channel
9	A3	SBU1	Sideband use wire 1
10	A2	SBU2	Sideband use wire 2
11	C1	MIC	Microphone signal
12	B2	AGND	Audio signal ground
13	B3	AGND	Audio signal ground
14	E2	SENSE	Audio ground reference output
15	C3	INT	I <sup>2</sup> C Interrupt output, active low (open drain)
16	D2	CC_IN	Audio accessory attachment detection input
17	D1	GSBU1	Audio sense path 1 to headset jack GND
18	E1	GSBU2	Audio sense path 2 to headset jack GND
19	C2	DET	Push-pull output. When CC_IN > 1.5 V, DET is low and CC_IN < 1.2 V, DET is high
20	D3	SCL	I <sup>2</sup> C clock
21	E3	SDA	I <sup>2</sup> C data
22	B1	SBU2_H	Host Side Sideband Use Wire 2
23	A1	SBU1_H	Host Side Sideband Use Wire 1
24	A4	ENN	Chip Enable, active low, internal pull-down by 470 kΩ
25	B4	ADDR	I <sup>2</sup> C slave address pin

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Min.	Max.	Unit
VCC	Supply Voltage from VCC		-0.5	6.5	V
VCC_IN	VCC_IN, to GND		-0.5	20	V
VSW_C	VDP_R to GND, VDN_L to GND		-3.5	20	V
VSW_USB	VDP to GND, VDN to GND		-0.5	6.5	V
VSW_Audio	VL to GND, VR to GND		-3.6	6.5	V
VV_SBU/GSBU	VSBU1 to GND, VSBU2 to GND, VGSBU1 to GND, VGSBU1 to GND		-0.5	20	V
VV_SBU_H	VSBU1_H to GND, VSBU2_H to GND		-0.5	6.5	V
VI/O	SENSE, MIC, DET, INT, to GND		-0.5	6.5	V
VCNTRL	Control Input Voltage	SDA, SCL, ENN, ADDR	-0.5	6.5	V
ISW_Audio	Switch I/O Current, Audio Path		-250	250	mA
ISW_USB	Switch I/O Current, USB Path		-	100	mA
ISW_MIC	Switch I/O Current, MIC to SBU1 or SBU2		-	50	mA
ISW_SBU	Switch I/O Current, SBUx to SBUx_H		-	50	mA
ISW_SENSE	Switch I/O Current, SENSE to GSBU1 or GSBU2		-	100	mA
ISW_AGND	Switch I/O Current, AGND to SBU1 or SBU2		-	500	mA
IIK	DC Input Diode Current		-50	-	mA
ESD	Human Body Model, ANSI/ESDA/JEDEC JS-001-2012	Connector side and power pins: VCC, SBU1, SBU2, DP_R, DN_L, GSBU1, GSBU2, CC_IN	4	-	kV
ESD	Human Body Model, ANSI/ESDA/JEDEC JS-001-2012	Host side pins: the rest pins	2	-	kV
ESD	Charged Device Model, JEDEC: JESD22-C101		1	-	kV
TA	Absolute Maximum Operating Temperature		-40	85	C
TSTG	Storage Temperature		-65	150	C

### CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. Broadchip recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

Broadchip reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact Broadchip sales office to get the latest datasheet.

### RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min.	Typ.	Max.	Unit
<b>POWER</b>					
V <sub>CC</sub>	Supply Voltage	2.7	–	5.5	V
<b>USB SWITCH</b>					
V <sub>SW_USB</sub>	V <sub>DP</sub> to GND, V <sub>DN</sub> to GND, V <sub>DP_R</sub> to GND, V <sub>DN_L</sub> to GND	0	–	3.6	V
<b>AUDIO SWITCH</b>					
V <sub>SW_Audio</sub>	V <sub>DP_R</sub> to GND, V <sub>DN_L</sub> to GND, V <sub>L</sub> to GND, V <sub>R</sub> to GND	–3.6	–	3.6	V
<b>MIC SWITCH</b>					
V <sub>VSBU_MIC</sub>	V <sub>SBU1</sub> to GND, V <sub>SBU2</sub> to GND, V <sub>MIC</sub> to GND	0	–	3.6	V
<b>SENSE SWITCH</b>					
V <sub>VGSBU_SE</sub> N	V <sub>G</sub> SBU1 to GND, V <sub>G</sub> SBU2 to GND, V <sub>SENSE</sub> to GND	0	–	3.6	V
<b>SBU TO SBUX_H SWITCH</b>					
V <sub>VGSBU</sub>	V <sub>SBU1</sub> to GND, V <sub>SBU2</sub> to GND, V <sub>SBU1_H</sub> to GND, V <sub>SBU2_H</sub> to GND	0	–	3.6	V
<b>CC_IN PIN</b>					
V <sub>CC_IN</sub>	V <sub>CC_IN</sub> , to GND	0	–	5.5	V
<b>CONTROL VOLTAGE (ENN/SDA/SCL)</b>					
V <sub>IH</sub>	Input Voltage High	1.3	–	V <sub>CC</sub>	V
V <sub>IL</sub>	Input Voltage Low	–	–	0.5	V
<b>OPERATING TEMPERATURE</b>					
T <sub>A</sub>	Ambient Operating Temperature	–40	25	+85	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

### ELECTRICAL CHARACTERISTICS

( $V_{CC} = 2.7\text{ V to }5.5\text{ V}$ ,  $V_{CC}(\text{Typ.}) = 3.3\text{ V}$ ,  $T_A = -40\text{ }^{\circ}\text{C to }85\text{ }^{\circ}\text{C}$ , and  $T_A(\text{Typ.}) = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified.)

Symbol	Parameter	Condition	Power	Min.	Typ.	Max.	Unit
$I_{CC}$	Supply Current	USB switches on, SBUx to SBUx_H switches on	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-	-	65	$\mu\text{A}$
		Audio switches on, MIC switch on and Audio GND switch on		-	-	60	$\mu\text{A}$
$I_{CCZ}$	Quiescent Current	ENN = L, 04H'b7 = 0		-	-	5	$\mu\text{A}$

#### USB/AUDIO COMMON PINS: DP/R, DN\_L

$I_{OZ}$	Off Leakage Current of DP_R and DN_L	DN_L, DP_R = -3 V to 3.6 V	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-3.0	-	3.0	$\mu\text{A}$
$I_{OFF}$	Power-Off Leakage Current of DP_R and DN_L	DN_L, DP_R = 0 V to 3.6 V	Power off	-3.0	-	3.0	$\mu\text{A}$
$V_{OV\_TRIP}$	Input OVP Lockout	Rising edge	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	4.5	5	5.3	V
$V_{OV\_HYS}$	Input OVP Hysteresis			-	0.3	-	V

#### AUDIO SWITCH

$I_{ON}$	On Leakage Current of Audio Switch	DN_L, DP_R = -3 V to 3.0 V, DP, DN, R, L = Float	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-2.5	-	2.5	$\mu\text{A}$
$I_{OFF}$	Power-Off Leakage Current of L and R	L, R = 0 V to 3 V; DP_R, DN_L = Float	Power off	-1.0	-	1.0	$\mu\text{A}$
$R_{ON\_AUDIO}$	Audio Switch On Resistance	$I_{SW} = 100\text{ mA}$ , $V_{SW} = -3\text{ V to }3\text{ V}$	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-	1.0	2.1	$\Omega$
$R_{SHUNT}$	Pull Down Resistor on R/L Pin when Audio Switch is Off	L=R=3 V		6	10	14	$\text{k}\Omega$

#### USB SWITCH

$I_{ON}$	On Leakage Current of USB Switch	DN_L, DP_R = 0 V to 3.6 V, DP, DN, R, L = Float	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-3.0	-	3.0	$\mu\text{A}$
$I_{OZ}$	Off Leakage Current of DP and DN	DN, DP = 0 V to 3.6 V		-3.0	-	3.0	$\mu\text{A}$
$I_{OFF}$	Power-Off Leakage Current of DP and DN	DN, DP = 0 V to 3.6 V	Power off	-3.0	-	3.0	$\mu\text{A}$
$R_{ON\_USB}$	USB Switch On Resistance	$I_{SW} = 8\text{ mA}$ , $V_{SW} = 0.4\text{ V}$	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-	3.0	5.2	$\Omega$

### SENSE SWITCH

$I_{ON}$	Sense Path Leakage Current	GSBUx = 0 V to 1 V, SENSE is floating	$V_{CC}$ : 2.7 V to 5.5 V	-2.0	-	2.0	$\mu A$
$R_{ON\_SENSE}$	SENSE Switch On Resistance	$I_{sw} = 100\text{ mA}$ , $V_{sw} = 1V$	$V_{CC}$ : 2.7 V to 5.5 V	0.30	0.45	0.60	$\Omega$
$I_{OZ}$	Off Leakage Current of SENSE	Sense = 0 V to 1.0 V		-2.0	-	2.0	$\mu A$
	Off Leakage Current of GSBUX	GSBUx = 0 V to 1.0 V		-2.0	-	2.0	$\mu A$
		GSBUx = 1 V to 3.6V		-3.0	-	3.0	
$I_{OFF}$	Power-Off Leakage Current of SENSE	Sense = 0 V to 1.0 V	Power off	-2.0	-	2.0	$\mu A$
	Power-Off Leakage Current of GSBUX	GSBUx = 0 V to 3.6V		-3.0	-	3.0	
$V_{OV\_TRIP}$	Input OVP Lockout on GSBUX	Rising edge	$V_{CC}$ : 2.7 V to 5.5 V	4.5	5	5.3	V
$V_{OV\_HYS}$	Input OVP Hysteresis of GSBUX			-	0.3	-	V

### SBUX PINS

$I_{OZ}$	Off Leakage Current of SBUX	SBUX = 0 V to 3.6 V	$V_{CC}$ : 2.7 V to 5.5 V	-3.0	-	3.0	$\mu A$
$I_{OFF}$	Power-Off Leakage Current Port SBUX	SBUX = 0 V to 3.6 V	Power off	-3.0	-	3.0	$\mu A$
$V_{OV\_TRIP}$	Input OVP Lockout	Rising edge	$V_{CC}$ : 2.7 V to 5.5 V	4.5	5	5.3	V
$V_{OV\_HYS}$	Input OVP Hysteresis			-	0.3	-	V

### MIC SWITCH

$I_{ON}$	On Leakage Current of MIC Switch	SBUX = 0 V to 3.6 V, MIC is floating	$V_{CC}$ : 2.7 V to 5.5 V	-3.0	-	3.0	$\mu A$
$I_{OZ}$	Off Leakage Current of MIC	MIC = 0 V to 3.6 V		-1.0	-	1.0	$\mu A$
$I_{OFF}$	Power Off Leakage Current of MIC	MIC = 0 V to 3.6 V	Power off	-1.0	-	1.0	$\mu A$
$R_{ON\_MIC}$	MIC Switch On Resistance	$I_{sw} = 30\text{ mA}$ , $V_{sw} = 3.6\text{ V}$	$V_{CC}$ : 2.7 V to 5.5 V	1.7	3.0	3.9	$\Omega$

### SBUX\_H SWITCH

$I_{ON}$	On Leakage Current of SBUX_H Switch	SBUX = 0 V to 3.6 V, SBUX_H is floating	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-3.0	-	3.0	$\mu\text{A}$
$I_{OZ}$	Off Leakage of SBUX_H	SBUX_H = 0 V to 3.6 V		-1	-	1	$\mu\text{A}$
$I_{OFF}$	Power Off Leakage Current of SBUX_H	SBUX_H = 0 V to 3.6 V	Power off	-1.0	-	1.0	$\mu\text{A}$
$R_{ON\_SBU}$	SBUX_H Switch On Resistance	$I_{sw} = 30\text{ mA}$ , $V_{SW} = 0\text{ V to }3.6\text{ V}$	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	1.5	3.0	3.5	$\Omega$

### AUDIO GROUND SWITCH: PIN: AGND TO SBUX

$R_{ON\_AGND}$	AGND Switch On Resistance	$I_{SOURCE} = 100\text{ mA}$ on SBUX	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	30	50	90	$\text{m}\Omega$
----------------	---------------------------	--------------------------------------	--	----	----	----	------------------

### CC\_IN PIN

$V_{TH\_L}$	Input Low Threshold		$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	-	1.2	-	V
$V_{TH\_H}$	Input High Threshold			-	1.5	-	V
$I_{IN}$	Input Leakage of CC_IN	CC_IN = 0 V to 5.5 V		-	-	1.0	$\mu\text{A}$

### INT, DET PINS

$V_{OH}$	Output High for DET	$I_o = -2\text{ mA}$	$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	1.5	1.8	2	V
$V_{OL}$	Output Low for DET and INT	$I_o = 2\text{ mA}$		-	-	0.4	V

### ADDR PIN

$V_{IH}$	Input voltage High		$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	1.3	-	-	V
$V_{IL}$	Input voltage Low			-	-	0.45	V
$I_{IN}$	Control Input Leakage	ADDR = 0 V to $V_{CC}$		-1	-	1	$\mu\text{A}$

### ENN PIN

$V_{IH}$	Input Voltage High		$V_{CC}: 2.7\text{ V to }5.5\text{ V}$	1.3	-	-	V
$V_{IL}$	Input Voltage Low			-	-	0.45	V
$R_{PD}$	Internal Pull Down Resistor			-	470	-	$\text{k}\Omega$





# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### SDA, SCL PINS

$V_{IL12C}$	Low-Level Input Voltage		$V_{CC}: 2.7\text{ V to } 5.5\text{ V}$	–	–	0.4	V
$V_{IH12C}$	High-Level Input Voltage			1.2	–	–	V
$I_{12C}$	Input Current of SDA and SCL Pins	$SCL/SDA = 0\text{ V to } 3.6\text{ V}$		–2	–	2	$\mu\text{A}$
$V_{OLSDA}$	Low-Level Output Voltage	$I_{OL} = 2\text{ mA}$		–	–	0.3	V
$I_{OLSDA}$	Low-Level Output Current	$V_{OLSDA} = 0.2\text{ V}$		10	–	–	mA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted.

Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

### AC ELECTRICAL CHARACTERISTICS

( $V_{CC} = 2.7\text{ V to } 5.5\text{ V}$ ,  $V_{CC}(\text{Typ.}) = 3.3\text{ V}$ ,  $T_A = -40\text{ }^{\circ}\text{C to } 85\text{ }^{\circ}\text{C}$ , and  $T_A(\text{Typ.}) = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified.)

Symbol	Parameter	Condition	Power	Min.	Typ.	Max.	Unit
--------	-----------	-----------	-------	------	------	------	------

#### AUDIO SWITCH

$t_{\text{delay}}$	Audio Switch Turn On Delay Time	$DP\_R = DN\_L = 1\text{ V}$ , $R_L = 32\text{ }\Omega$	$V_{CC} = 3.3\text{ V}$	-	65	-	$\mu\text{s}$
$t_{\text{rise}}$	Audio Switch Turn On Rising Time (Note 1)	$DP\_R = DN\_L = 1\text{ V}$ , $R_L = 32\text{ }\Omega$		-	240	-	$\mu\text{s}$
$t_{\text{OFF}}$	Audio Switch Turn Off Time	$DP\_R = DN\_L = 1\text{ V}$ , $R_L = 32\text{ }\Omega$		-	15	-	$\mu\text{s}$
$X_{\text{TALK}}$	Cross Talk (Adjacent)	$f = 1\text{ kHz}$ , $R_L = 50\text{ }\Omega$ , $V_{\text{SW}} = 1\text{ V}_{\text{RMS}}$		-	-100	-	dB
BW	-3 dB Bandwidth	$R_L = 50\text{ }\Omega$		-	600	-	MHz
$O_{\text{IRR}}$	Off Isolation	$F = 1\text{ kHz}$ , $R_L = 50\text{ }\Omega$ , $C_L = 0\text{ pF}$ , $V_{\text{SW}} = 1\text{ V}_{\text{RMS}}$		-	-100	-	dB
THD+N	Total Harmonic Distortion + Noise Performance with A-weighting Filter	$R_L = 600\text{ }\Omega$ , $f = 20\text{ Hz} \sim 20\text{ kHz}$ , $V_{\text{SW}} = 2\text{ V}_{\text{RMS}}$		-	-110	-	dB
		$R_L = 32\text{ }\Omega$ , $f = 20\text{ Hz} \sim 20\text{ kHz}$ , $V_{\text{SW}} = 1\text{ V}_{\text{RMS}}$		-	-110	-	dB
		$R_L = 16\text{ }\Omega$ , $f = 20\text{ Hz} \sim 20\text{ kHz}$ , $V_{\text{SW}} = 0.5\text{ V}_{\text{RMS}}$		-	-108	-	dB

#### USB SWITCH

t <sub>ON</sub>	USB Switch Turn-on Time	DP_R = DN_L = 1.5 V, R <sub>L</sub> = 50 Ω	V <sub>CC</sub> = 3.3 V	-	60	-	μs
t <sub>OFF</sub>	USB Switch Turn -off Time	DP_R = DN_L = 1.5 V, R <sub>L</sub> = 50 Ω		-	15	-	μs
BW	-3 dB Bandwidth	R <sub>L</sub> = 50 Ω		-	850	-	MHz
	SDD <sub>21</sub> -3 dB Bandwidth			-	950	-	
O <sub>IRR</sub>	Off Isolation between DP, DN and Com- mon Node Pins	f = 1 kHz, R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 0 pF, V <sub>SW</sub> = 1 V <sub>RMS</sub>		-	-100	-	dB
t <sub>OVP</sub>	DP_R and DN_L pins OVP Response Time	V <sub>sw</sub> = 3.5 V to 5.5 V		-	1	1.5	μs

### MIC/AUDIO GROUND SWITCH

$t_{\text{delay\_MIC}}$	MIC Switch Turn On Delay Time	$SBUx = 1\text{ V}, R_L = 50\ \Omega$	$V_{CC} = 3.3\text{ V}$	–	100	–	$\mu\text{s}$
$t_{\text{rise\_MIC}}$	MIC Switch Turn On Rising Time (Note 1)			–	250	–	
$t_{\text{delay\_AGND}}$	AGND Switch Turn On Time	$SBUx$ pulled up to 0.5 V by 16 $\Omega$ , AGND connect to GND	$V_{CC} = 3.3\text{ V}$	–	100	–	$\mu\text{s}$
$t_{\text{rise\_AGND}}$	AGND Switch Turn On Rising Time (Note 1)			–	1500	–	
$t_{\text{OFF\_MIC}}$	MIC Switch Turn Off Time			–	15	–	
$t_{\text{OFF\_Audio GND}}$	AGND Switch Turn Off Time			–	15	–	
BW	MIC Switch Bandwidth	$R_L = 50\ \Omega$		–	50	–	MHz

### SBUx\_H SWITCH

$t_{\text{ON}}$	SBUx_H Switch Turn On Time	$SBUx = 2.5\text{ V}, R_L = 50\ \Omega$	$V_{CC} = 3.3\text{ V}$	–	35	–	$\mu\text{s}$
$t_{\text{OFF}}$	SBUx_H Switch Turn Off Time			–	15	–	
BW	Bandwidth	$R_L = 50\ \Omega$		–	50		MHz
$t_{\text{OVP}}$	SBUx Pins OVP Response Time	$V_{\text{sw}} = 3.5\text{ V to }5.5\text{ V}$		–	0.5	1	$\mu\text{s}$

### SENSE SWITCH

$t_{\text{delay}}$	Sense Switch Turn On Delay Time	$GSBUx = 1\text{ V}, R_L = 50\ \Omega$	$V_{CC} = 3.3\text{ V}$	–	65	–	$\mu\text{s}$
$t_{\text{rise}}$	Sense Switch Turn On Rising Time (Note 1)			–	260	–	$\mu\text{s}$
$t_{\text{OFF}}$	Sense Switch Turn Off Time			–	15	–	$\mu\text{s}$
$t_{\text{OVP}}$	GSBUx Pins OVP Response Time	$V_{\text{SW}}: 3.5\text{ V to }5.5\text{ V}$		–	0.7	1.5	$\mu\text{s}$
BW	Bandwidth	$R_L = 50\ \Omega$		–	150	–	MHz

### DET DELAY

$t_{\text{DELAY\_DET}}$	DET Response Delay	Transition from 0 to 1.8 V	$V_{CC} = 3.3\text{ V}$	–	1	–	$\mu\text{s}$
		Transition from 1.8 to 0 V		–	5	–	

1. Turn on timing can be controlled by I<sup>2</sup>C register.

### I<sup>2</sup>C SPECIFICATION

(V<sub>CC</sub> = 2.7 V to 5.5, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40 °C to 85 °C, T<sub>A</sub> (Typ.) = 25 °C, unless otherwise specified)

Symbol	Parameter	Fast Mode		
		Min.	Max.	Unit
f <sub>SCL</sub>	I <sup>2</sup> C_SCL Clock Frequency		400	kHz
t <sub>HD; STA</sub>	Hold Time (Repeated) START Condition	0.6		μs
t <sub>LOW</sub>	Low Period of I <sup>2</sup> C_SCL Clock	1.3		μs
t <sub>HIGH</sub>	High Period of I <sup>2</sup> C_SCL Clock	0.6		μs
t <sub>SU; STA</sub>	Set-up Time for Repeated START Condition	0.6		μs
t <sub>HD; DAT</sub>	Data Hold Time (Note 2)	0	0.9	μs
t <sub>SU; DAT</sub>	Data Set-up Time (Note 3)	100		ns
t <sub>r</sub>	Rise Time of I <sup>2</sup> C_SDA and I <sup>2</sup> C_SCL Signals (Note 3)	20 + 0.1C <sub>b</sub>	300	ns
t <sub>f</sub>	Fall Time of I <sup>2</sup> C_SDA and I <sup>2</sup> C_SCL Signals (Note 3)	20 + 0.1C <sub>b</sub>	300	ns
t <sub>SU; STO</sub>	Set-up Time for STOP Condition	0.6		μs
t <sub>BUF</sub>	Bus-Free Time between STOP and START Conditions	1.3		μs
t <sub>SP</sub>	Pulse Width of Spikes that Must Be Suppressed by the Input Filter	0	50	ns

2. Guaranteed by design, not production tested.

3. A fast-mode I<sup>2</sup>C-bus device can be used in a standard-mode I<sup>2</sup>C-bus system, but the requirement t<sub>SU; DAT</sub> = 250 ns must be met. This is automatically the case if the device does not stretch the LOW period of the I<sup>2</sup>C\_SCL signal. If such a device does stretch the LOW period of the I<sup>2</sup>C\_SCL signal, it must output the next data bit to the I<sup>2</sup>C\_SDA line t<sub>r\_max</sub> + t<sub>SU; DAT</sub> = 1000 + 250 = 1250 ns (according to the standard-mode I<sup>2</sup>C bus specification) before the I<sup>2</sup>C\_SCL line is released.

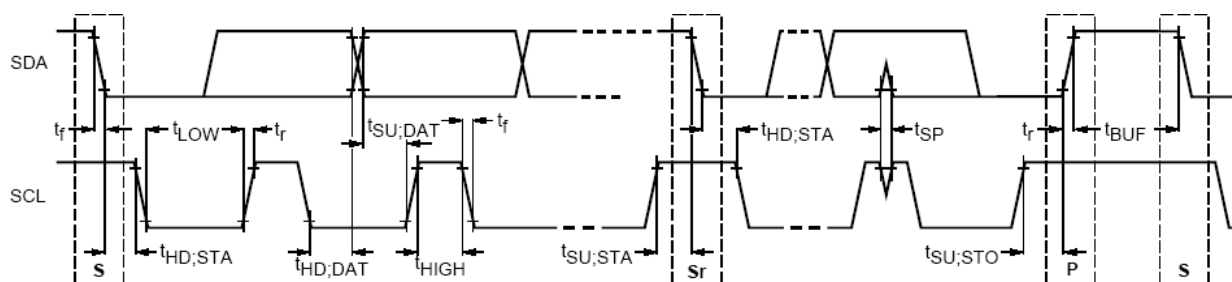


Figure 3. Definition of Timing for Full-Speed Mode Devices on the I<sup>2</sup>C Bus

### CAPACITANCE

(VCC = 2.7 V to 5.5 V, VCC (Typ.) = 3.3 V, T<sub>A</sub> = -40 °C to 85 °C, and T<sub>A</sub> (Typ.) = 25 °C)

Symbol	Parameter	Condition	Power	T <sub>A</sub> = -40 °C to +85 °C			Unit
				Min.	Typ.	Max.	
C <sub>ON_USB/Audio</sub>	On Capacitance <sup>(6)</sup> (Common Port)	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias	VCC = 3.3 V		9		pF
C <sub>OFF_USB/Audio</sub>	Off Capacitance <sup>(6)</sup> (Common Port)	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			7.5		pF
C <sub>OFF_USB</sub>	Off Capacitance (Non-Common Ports) <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			3		pF
C <sub>ON_SENSE_SW</sub>	On Capacitance – (Common Ports) <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			55		pF
C <sub>OFF_SENSE_SW</sub>	Off Capacitance – (Common Ports) <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			88		pF
C <sub>ON_MIC_SW</sub>	On Capacitance – (Common Ports) <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			170		pF
C <sub>OFF_MIC_SW</sub>	Off Capacitance – (Common Ports) <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			10		pF
C <sub>ON_AGND_SW</sub>	On Capacitance <sup>(6)</sup> (Common Port)	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			125		pF
C <sub>ON_SBUx_H_SW</sub>	On Capacitance <sup>(6)</sup> (Common Port)	f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias			160		pF
C <sub>CTRL</sub>	Control Input Pin Capacitance <sup>(6)</sup>	f = 1 MHz, 100 mV <sub>PP</sub> , 100 mV DC bias	ENN		3		pF



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### REGISTER MAPS

ADDR	Register Name	Type	Reset Value	BIT7		BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0	
00H	Device ID	R	0x09	0		0	0	0	1	0	0	1	
01H	OVP Interrupt Mask	R/W	0x00	Reserved	Mask OVP interrupt	Mask OVP /DP_R	Mask OVP /DN_L	Mask OVP /SBU1	Mask OVP /SBU2	Mask OVP /GSBU1	Mask OVP /GSBU2		
02H	OVP interrupt flag	R/C	0x00	Reserved			DP_R	DN_L	SBU1	SBU2	GSBU	GSBU2	
03H	OVP status	R	0x00	Reserved			OVP/ DP_R	OVP/ DN_L	OVP/SB U1	OVP/SB U2	OVP/ GSBU1	OVP/ GSBU2	
04H	Switch settings Enable	R/W	0x98	Device control	SBU1_H to SBUx	SBU2_H to SBUx	DN_L to DN or L	DP_R to DP or R	Sense to GSBUx	MIC to SBUx	Audio Ground to SBUx		
05H	Switch select	R/W	0x18	Reserved	SBU1_H to SBUx	SBU2_H to SBUx	DN_L to DN or L	DP_R to DP or R	Sense to GSBUx	MIC to SBUx	Audio Ground to SBUx		
06H	Switch Status0	R	0x05	Reserved			Sense Switch Status		DP_R Switch Status		DN_L Switch Status		
07H	Switch Status1	R	0x00	Reserved			SBU2 Switch Status				SBU1 Switch Status		
08H	Audio Switch Left Channel turn on Control	R/W	0x01	Audio switch left channel slow control [7:0]									
09H	Audio Switch Right Channel turn on Control	R/W	0x01	Audio switch right channel slow control [7:0]									
0AH	MIC switch turn on control	R/W	0x01	MIC switch right channel slow control [7:0]									
0BH	Sense switch turn on control	R/W	0x01	Sense switch right channel slow control [7:0]									
0CH	Audio Ground Switch turn on Control	R/W	0x01	Audio ground switch right channel slow control [7:0]									
0DH	Timing Delay between R switch enable and L switch enable	R/W	0x00	Timing Delay between R switch enable and L switch enable control [7:0]									
0EH	Timing Delay between MIC switch enable and L switch enable	R/W	0x00	Timing Delay between MIC switch enable and L switch enable control [7:0]									
0FH	Timing Delay between Sense switch enable and L switch enable	R/W	0x00	Timing Delay between Sense switch enable and L switch enable control [7:0]									



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### REGISTER MAPS

ADDR	Register Name	Type	Reset Value	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
10H	Timing Delay between Audio ground switch enable and L switch enable	R/W	0x00	Timing Delay between Audio ground switch enable and L switch enable control [7:0]							
11H	Audio accessory status	R	0x02	Reserved						CC_IN	DET
12H	Function enable	R/W	0x08	Reserved	DET I/O Control	RES detection range setting	GIPO control	SLOW TURN-ON CONTR OLL	MIC auto control	RES detection : auto clear	Audio jack detection : auto clear
13H	RES detection pin setting	R/W	0x00	Reserved					Detection pin select [2:0]		
14H	RES detection value	R	0xFF	R detection value [7:0]							
15H	RES detection interrupt threshold	R/W	0x16	R detection Interrupt resistance threshold [7:0]							
16H	RES detection interval	R/W	0X00	Reserved						Detection interval [1:0]	
17H	Audio jack Status	RO	0x01	Reserved				4pole,SB U2 MIC	4pole,SB U1 MIC	3pole	No audio
18H	Detection interrupt	R/C	0x00	Reserved					Audio detection n done	RES detection occurred	RES detection done
19H	Detection interrupt Mask	R/W	0x00	Reserved					Audio detection n done mask	RES detection occurred mask	RES detection n done mask
1AH	Audio detection RGE1	RO	0xFF	audio detection value REG1 [7:0]							
1BH	Audio detection RGE2	RO	0xFF	audio detection value REG2 [7:0]							
1CH	MIC Threshold DATA0	R/W	0x20	MIC Threshold value DATA0 [7:0]							
1DH	MIC Threshold DATA1	R/W	0xFF	MIC Threshold value DATA1 [7:0]							
1EH	I2C Reset	W/C	0x00	Reserved							I2C reset
1FH	Current Source Setting	R/W	0x07	Reserved				Current Source setting [3:0]			

### I<sup>2</sup>C SLAVE ADDRESS

ADDR	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
ADDR = L	1	0	0	0	0	1	0	R/W
ADDR = H	1	0	0	0	0	1	1	R/W



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### DEVICE ID

Address: 00h

Reset Value: 8'b 0000\_1001

Type: Read

Bits	Name	Size	Description
7:6	Vendor ID	2	Vendor ID
5:3	Version ID	3	Device Version ID
2:0	Revision ID	3	Revision History ID

### OVP INTERRUPT MASK

Address: 01h

Reset Value: 8'b 0000\_0000

Type: Read/Write

Bits	Name	Size	Description
7	Reserved	1	Do Not Use
6	OVP Interrupt mask control	1	OVP Interrupt function Enable/Disable 0: Controlled by [5:0] bit 1: Mask all connector side pins OVP interrupt
5	DP_R OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt
4	DN_L OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt
3	SBU1 OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt
2	SBU2 OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt
1	GSBU1 OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt
0	GSBU2 OVP Interrupt mask control	1	0: Do not mask OVP interrupt 1: Mask OVP interrupt



### OVP INTERRUPT FLAG

Address: 02h

Reset Value: 8'b 0000\_0000

Type: Read Clear

Bits	Name	Size	Description
[7:6]	Reserved	2	Do Not Use
5	DP_R OVP	1	0: OVP event has not occurred 1: OVP event has occurred
4	DN_L OVP	1	0: OVP event has not occurred 1: OVP event has occurred
3	SBU1 OVP	1	0: OVP event has not occurred 1: OVP event has occurred
2	SBU2 OVP	1	0: OVP event has not occurred 1: OVP event has occurred
1	GSBU1 OVP	1	0: OVP event has not occurred 1: OVP event has occurred
0	GSBU2 OVP	1	0: OVP event has not occurred 1: OVP event has occurred

### OVP STATUS

Address: 03h

Reset Value: 8'b 0000\_0000

Type: Read

Bits	Name	Size	Description
[7:6]	Reserved	2	Do Not Use
5	OVP on DP_R PIN	1	0: OVP event has not occurred 1: OVP event has occurred
4	OVP on DN_L PIN	1	0: OVP event has not occurred 1: OVP event has occurred
3	OVP on SBU1 PIN	1	0: OVP event has not occurred 1: OVP event has occurred
2	OVP on SBU2 PIN	1	0: OVP event has not occurred 1: OVP event has occurred
1	OVP on GSBU1 PIN	1	0: OVP event has not occurred 1: OVP event has occurred
0	OVP on GSBU2 PIN	1	0: OVP event has not occurred 1: OVP event has occurred

### SWITCHING SETTING ENABLE

Address: 04h

Reset Value: 8'b 1001\_1000

Type: Read/Write

Bits	Name	Size	Description
7	Device Enable	1	0: Device Disable; L, R pull down by 10 k and other switch nodes will be high-Z for positive input. 1: Device Enable.  Device Enable = 1 Device enable = 0 ENN = 1 Device Disable Device Disable ENN = 0 Device Enable Device Disable
6	SBU1_H to SBUx switches	1	0: Switch Disable; SBU1_H will be high-Z for positive input 1: Switch Enable
5	SBU2_H to SBUx switches	1	0: Switch Disable; SBU2_H will be high-Z for positive input 1: Switch Enable
4	DN_L to DN or L switches	1	0: Switch Disable; DN_L, DN will be high-Z for positive input. L pull down by 10 kohm 1: Switch Enable
3	DP_R to DP or R switches	1	0: Switch Disable; DP_R, DP will be high-Z for positive input. R pull down by 10 kohm 1: Switch Enable
2	Sense to GSBUX switches	1	0: Switch Disable; Sense, GSBU1 and GSBU2 will be high-Z for positive input 1: Switch Enable
1	MIC to SBUx switches	1	0: Switch Disable: MIC will be high-Z for positive input. 1: Switch Enable
0	AGND to SBUx switches	1	0: Switch Disable: AGND will be high-Z for positive input. 1: Switch Enable

### SWITCH SELECT

Address: 05h

Reset Value: 8'b 0001\_1000

Type: Read/Write

Bits	Name	Size	Description
7	Reserved	1	Do Not Use
6	SBU1_H switches	1	0: SBU1_H to SBU1 switch ON 1: SBU1_H to SBU2 switch ON
5	SBU2_H switches	1	0: SBU2_H to SBU2 switch ON 1: SBU2_H to SBU1 switch ON
4	DN_L to DN or L switches	1	0: DN_L to L switch ON 1: DN_L to DN switch ON
3	DP_R to DP or R switches	1	0: DP_R to R switch ON 1: DP_R to DP switch ON
2	Sense to GSBUX switches	1	0: Sense to GSBU1 switch ON 1: Sense to GSBU2 switch ON
1	MIC to SBUx switches	1	0: MIC to SBU2 switch ON 1: MIC to SBU1 switch ON
0	AGND to SBUx switches	1	0: AGND to SBU1 switch ON 1: AGND to SBU2 switch ON

### SWITCH STATUS0

Address: 06h

Reset Value: 8'b 0000\_0101

Type: Read Only

Bits	Name	Size	Description
[7:6]	Reserved	2	Do not use
[5:4]	Sense Switch Status	2	00: Sense switch is Open/Not Connected 01: Sense connected to GSBU1 10: Sense connected to GSBU2 11: Not Valid
[3:2]	DP_RSwtch Status	2	00: DP_R Switch Open/Not Connected 01: DP_Rconnected to DP 10: DP_Rconnected to R 11: Not Valid
[1:0]	DN_L switch Status	2	00: DN_L Switch Open/Not Connected 01: DN_L connected to DN 10: DN_L connected to L 11: Not Valid



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### SWITCH STATUS1

Address: 07h

Reset Value: 8'b 0000\_0000

Type: Read Only

Bits	Name	Size	Description
[7:6]	Reserved	2	Do not use
[5:3]	SBU2 Switch Status	3	000: SBU2 switch is Open/Not Connected 001: SBU2 connected to MIC 010: SBU2 connected to AGND 011: SBU2 connected to SBU1_H 100: SBU2 connected to SBU2_H 101: SBU2 connected both SBU1_H and SBU2_H 110 111: Do not use
[2:0]	SBU1 Switch Status	3	000: SBU1 switch is Open/Not Connected 001: SBU1 connected to MIC 010: SBU1 connected to AGND 011: SBU1 connected to SBU1_H 100: SBU1 connected to SBU2_H 101: SBU1 connected both SBU1_H and SBU2_H 110 111: Do not use

### AUDIO SWITCH LEFT CHANNEL SLOW TURN-ON

Address: 08h

Reset Value: 8'b 0000\_0001

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Switch turn on rising time setting	8	11111111: 25600 $\mu$ S
			00000001: 200 $\mu$ S
			00000000: 100 $\mu$ S

### AUDIO SWITCH RIGHT CHANNEL SLOW TURN-ON

Address: 09h

Reset Value: 8'b 0000\_0001

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Switch turn on rising time setting	8	11111111: 25600 $\mu$ S
			00000001: 200 $\mu$ S
			00000000: 100 $\mu$ S



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### MIC SWITCH SLOW TURN-ON

Address: 0Ah

Reset Value: 8'b 0000\_0001

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Switch turn on rising time setting	8	11111111: 25700 $\mu$ S
			00000010: 350 $\mu$ S
			00000001: 250 $\mu$ S
			00000000: Not Valid

### SENSE SWITCH SLOW TURN-ON

Address: 0Bh

Reset Value: 8'b 0000\_0001

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Switch turn on rising time setting	8	11111111: 25600 $\mu$ S
			00000001: 200 $\mu$ S
			00000000: 100 $\mu$ S

### AUDIO GROUND SWITCH SLOW TURN-ON

Address: 0Ch

Reset Value: 8'b 0000\_0001

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Switch turn on rising time setting	8	11111111: 179000 $\mu$ S
			00000001: 1400 $\mu$ S
			00000000: 700 $\mu$ S



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### TIMING DELAY BETWEEN R SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Dh

Reset Value: 8'b 0000\_0000

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Delay timing setting	8	11111111: 25500 $\mu$ S
			11111110: 25400 $\mu$ S
			00000001: 100 $\mu$ S
			00000000: 0 $\mu$ S

### TIMING DELAY BETWEEN MIC SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Eh

Reset Value: 8'b 0000\_0000

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Delay timing setting	8	11111111: 25500 $\mu$ S
			11111110: 25400 $\mu$ S
			00000001: 100 $\mu$ S
			00000000: 0 $\mu$ S

### TIMING DELAY BETWEEN SENSE SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Fh

Reset Value: 8'b 0000\_0000

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Delay timing setting	8	11111111: 25500 $\mu$ S
			11111110: 25400 $\mu$ S
			00000001: 100 $\mu$ S
			00000000: 0 $\mu$ S



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

### TIMING DELAY BETWEEN AUDIO GROUND SWITCH ENABLE AND L SWITCH ENABLE

Address: 10h

Reset Value: 8'b 0000\_0000

Type: Read/Write

Bits	Name	Size	Description
[7:0]	Delay timing setting	8	11111111: 25500 $\mu$ S
			11111110: 25400 $\mu$ S
			00000001: 100 $\mu$ S
			00000000: 0 $\mu$ S

### AUDIO ACCESSORY STATUS

Address: 11h

Reset Value: 8'b 0000\_0010

Type: Read

Bits	Name	Size	Description
[7:2]	Reserved	6	Do not use
1	CC_IN	1	0: CC_IN < 1.2 V 1: CC_IN > 1.5 V
0	DET	1	0: DET output is low 1: DET is output is high

### FUNCTION ENABLE

Address: 12h

Reset Value: 8'b 0000\_1000

Type: Read/Write

Bits	Name	Size	Description
7	Reserved	1	Do not use
6	DET I/O Control	1	1: DET pin is in Open/Drain Configuration 0: DET pin is in Push/Pull Configuration
5	RES detection range setting	1	1: 10k to 2560 k 0: 1k to 256 k
4	GPIO control enable	1	1: enable 0: disable
3	Slow turn on control enable	1	1: enable 0: disable
2	MIC auto break out control enable	1	1: enable 0: disable
1	RES detection enable	1	1: enable; will be changed to '0' after low resistance detection 0: disable
0	Audio jack detection and configuration enable	1	1: enable; will be changed to '0' after audio jack detection and configuration 0: disable

When GPIO control mode (manual switch control) is enable. '**Switch control**' register is changed to read only. It will reflect switch status. I<sup>2</sup>C slave address is 0x42.

### RES DETECTION PIN SETTING

Address: 13h

Reset Value: 8'b 0000\_0000

Type: Read

Bits	Name	Size	Description
[7:3]	Reserved	5	Do not use
[2:0]	Pin selection	3	000: CC_IN 001: DP/R 010: DN_L 011: SBU1 100: SBU2 101: Do not use  111: Do not use



If RES detection pin is enable before setting PIN selection it will always do the CC\_IN first. Recommend user to select the pin first before setting the RES detection pin enable.

### RES VALUE

Address: 14h

Reset Value: 8'b

1111\_1111 Type: Read

Bits	Name	Size	Description
[7:0]	Detected resistance value	8	0000_0000 : R < 1 k  1111_1111: R > 300 K

### RES DETECTION THRESHOLD

Address: 15h

Reset Value: 8'b 0001\_0110

Type: Read

Bits	Name	Size	Description
[7:0]	RES detection threshold	8	Selection by 1 KΩ per step if Reg 12h [5] = 0 ,Selection by 10 KΩ per step if Reg 12h [5] = 0 ,Default Value = 22 KΩ 0000_0000: 1 KΩ /10 KΩ  1111_1111: 256 KΩ / 2560 KΩ

### RES DETECTION INTERVAL

Address: 16h

Reset Value: 8'b 0000\_0000

Type: Read

Bits	Name	Size	Description
[7:2]	Reserved	6	Do not use
[1:0]	RES detection interval	2	00: Single 01: 100 mS 10: 1 S 11: 10 S

### AUDIO JACK STATUS

Address: 17h

Reset Value: 8'b 0000\_0001

Type: Read

Bits	Name	Size	Description
[7:3]	Reserved	4	Do not use
3	4pole	1	1: 4 Pole SBU2 to MIC, SBU1 to audio ground 0: others
2	4pole	1	1: 4 Pole SBU1 to MIC, SBU2 to audio ground 0: others
1	3 pole	1	1: 3 pole 0: others
0	No audio accessory	1	1: No audio accessory 0: Audio accessory attached

### RES DETECTION /AUDIO JACK DETECTION INTERRUPT FLAG

Address: 18h

Reset Value: 8'b 0000\_0000

Type: Read Clear

Bits	Name	Size	Description
[7:3]	Reserved	5	Do Not Use
2	Audio jack detection and configuration	1	0: Audio jack detection and configuration has not occurred 1: Audio jack detection and configuration has occurred
1	Low resistance occurred	1	0: Low resistance has not occurred 1: Low resistance has occurred
0	Low resistance detection	1	0: Low resistance has not occurred 1: Low resistance has occurred

### RES /AUDIO JACK DETECTION INTERRUPT MASK

Address: 19h

Reset Value: 8'b 0000\_0000

Type: Read Clear

Bits	Name	Size	Description
[7:3]	Reserved	5	Do Not Use
2	Audio jack detection and configuration	1	1: Mask Audio jack detection and configuration has occurred interrupt
1	Low resistance occurred	1	1: Low resistance has occurred interrupt
0	Low resistance detection	1	1: Low resistance detection has occurred interrupt

### AUDIO JACK DETECTION REG1 VALUE



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

Address: 1Ah

Reset Value: 8'b

1111\_1111 Type: Read

Bits	Name	Size	Description
[7:0]	Audio jack detection value	8	Resistance between SBU1 to SBU2

### AUDIO JACK DETECTION REG2 VALUE

Address: 1Bh

Reset Value: 8'b

1111\_1111 Type: Read

Bits	Name	Size	Description
[7:0]	Audio jack detection value	8	Resistance between SBU2 to SBU1

### MIC DETECTION THRESHOLD DATA0

Address: 1Ch

Reset Value: 8'b 0010\_0000

Type: Read/Write

Bits	Name	Size	Description
[7:0]	MIC detection threshold DATA0	8	MIC detection threshold DATA0 0010_0000: 300 mV

### MIC DETECTION THRESHOLD DATA1

Address: 1Dh

Reset Value: 8'b

1111\_1111 Type:

Read/Write

Bits	Name	Size	Description
[7:0]	MIC detection threshold DATA1	8	MIC detection threshold DATA1 1111_1111: 2.4 V

### I2C RESET

Address: 1Eh

Reset Value: 8'b 0000\_0000

Type: W/C

Bits	Name	Size	Description
[7:1]	Reserved	7	Reserved
0	I2C reset	1	0: default 1: I2C reset

### CURRENT SOURCE SETTING



# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

Address: 1Fh

Reset Value: 8'b

0000\_0111 Type: Write

Bits	Name	Size	Description
[7:4]	Reserved	4	Reserved
[3:0]	Current Source Setting	4	1111: 1500 $\mu$ A 0111: 700 $\mu$ A 0001: 100 $\mu$ A 0000: invalid

## APPLICATION INFORMATION

REV1.2

[www.broadchip.com](http://www.broadchip.com)

Copyright © BROADCHIP TECHNOLOGY GROUP Co., Ltd.

28

### Over-Voltage Protection

BCT4480 features over-voltage protection (OVP) on receptacle side pins that switches off the internal signal routing path if the input voltage exceeds the OVP threshold. If OVP is occurred, interrupt signal can be send by INT signal and FLAG data will provide information that which pin had OVP event.

### Headset Detection

BCT4480 integrates headset unplug detection function by detecting the CC\_IN voltage. The function is always active when device is enabling. DET will be high when CC\_IN is low ( $CC\_IN < 1.2\text{ V}$ ). When CC\_IN = High ( $CC\_IN > 1.5\text{ V}$ ), DET will be released to low.

### MIC Switch Auto-off Function

The function is active during control bit 0x12h bit[2] = 1. When CC\_IN is high ( $CC\_IN > 1.5\text{ V}$ ) and L,R, Audio ground switches are under on status, MIC switch will be off and receptacle side pin will be connected to ground for 50  $\mu\text{S}$  first. Then it shows high-Z status under MIC switch is set on status.

### Audio Ground Detection and Configuration

The function is active when control bit 0x12h bit[0] = 1 and R, L AGND switches are set to be on status. For type-C interface analog headset, the audio ground could be SBU1 pin or SBU2 pin. The function will provide autonomous detection and configuration to route MIC and audio ground signal accordingly.

During detection and configuration, the R, L, Sense, MIC and Audio ground switch will be off. After detection and configuration, R and L switches will turn on according to switch configuration and timing setting. MIC, Sense and Audio ground will turn on according to detection results and timing control setting.

### Resistance Detection

The function is active during control bit 0x12h bit[1] = 1. It will monitor the resistance between receptacle side pins and ground. During resistance detection, the switch which is monitored will be off. The detection result will be saved in the resistance flag register. The measurement could be from 1 k $\Omega$  to 2.56 M $\Omega$  which is controlled by internal register. The detection interval can be set at 100 ms, 1 s or 10 s by register 0x16h.

### Manual Switch Control

The function is active during control bit 0x12h bit[4] = 1 and 0x04h = FF. It will provide manual control for device. During this

# BCT4480

## USB Type-C Analog Audio Switch with Protection Function

configuration, ADDR and INT pins will be set as logic control input.


(The function is active during control bit 0x12h bit[4] = 1 and 0x04h = FF. It will provide manual control for device. During this configuration, ADDR and INT pins will be set as logic control input.)

Power	ENN	ADDR	INT	SENSE Switch	Headset Detection	USB Switch	Audio Switch	MIC/ Audio GND Switch	SBU by Pass Switch
OFF	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF
ON	H	X	X	OFF	OFF	OFF	OFF	OFF	OFF
ON	L	0	0	OFF	OFF	ON: DP_R to DP DN_L to DN	OFF	OFF	ON: SBU1 to SBU1_H SBU2 to SBU2_H
ON	L	0	1	OFF	OFF	ON: DP_R to DP DN_L to DN	OFF	OFF	ON: SBU1 to SBU2_H SBU2 to SBU1_H
ON	L	1	0	ON GSBU2 to SESNE	ON	OFF	ON: DP_R to R DN_L to L	ON: SBU1 to MIC SBU2 to Audio GND	OFF
ON	L	1	1	ON GSBU1 to SESNE	ON	OFF	ON: DP_R to R DN_L to L	ON: SBU2 to MIC SBU1 to Audio GND	OFF

### I2C INTERFACE


The BCT4480 includes a full I2C slave controller. The I2C slave fully complies with the I2C specification version 2.1

requirements. This block is designed for fast mode, 400 kHz, signals. Examples of an I2C write and read sequence are shown in below figures respectively.

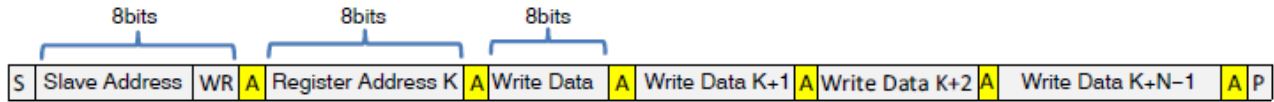

NOTE: Single Byte read is initiated by Master with P immediately following first data byte.

Figure 1. I2C Write Example

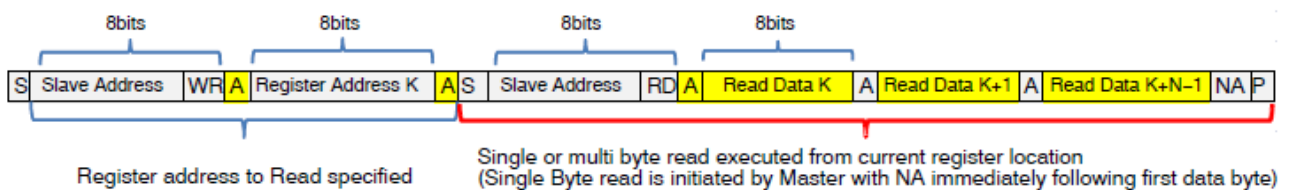

NOTE: If Register is not specified Master will begin read from current register. In this case only sequence showing in Red bracket is needed



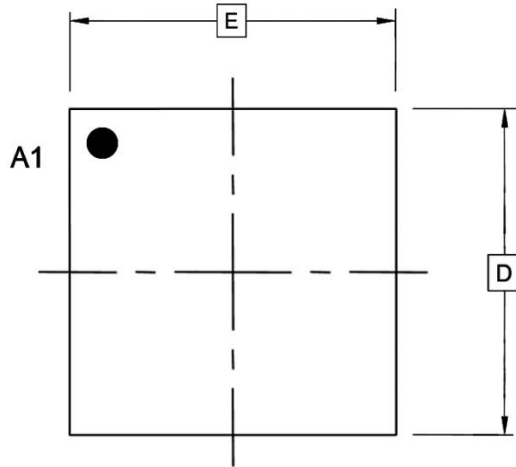
	From Master to Slave	<b>S</b> Start Condition	<b>NA</b> NOT Acknowledge (SDA High)	<b>RD</b> Read =1
	From Slave to Master	<b>A</b> Acknowledge (SDA Low)	<b>WR</b> Write = 0	<b>P</b> Stop Condition

Figure 2. I2C Read Example


## PACKAGE OUTLINE DIMENSIONS

### WLCSP-25L




TOP VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.556	0.586	0.616
A1	0.188	0.208	0.228
A2	0.360	0.378	0.396
b	0.240	0.260	0.280
D	2.255	2.275	2.295
E	2.215	2.235	2.255
e	0.40		

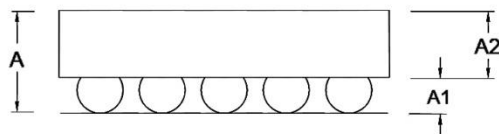

SIDE VIEW

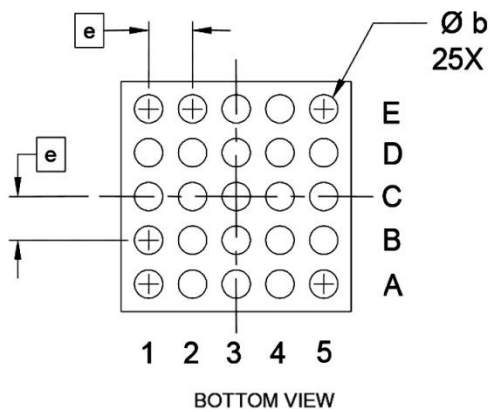

BOTTOM VIEW

